





The **STAIRTEC FL** stair nosing profile elegantly finishes stair edges. Its technical, rounded shape becomes a distinctive design feature which hides imperfections and conceals the riser edge, whereas the tread covering can be simply laid flush in the indented lip of the profile. Solid and long-lasting, **STAIRTEC FL** is truly a decorative element in the design of the staircase. The grooved top surface is slip resistant and the profile is suited for both residential and commercial applications.

stairtec™ FL



(FL 80*)

Note: Stainless steel version has a slightly different section

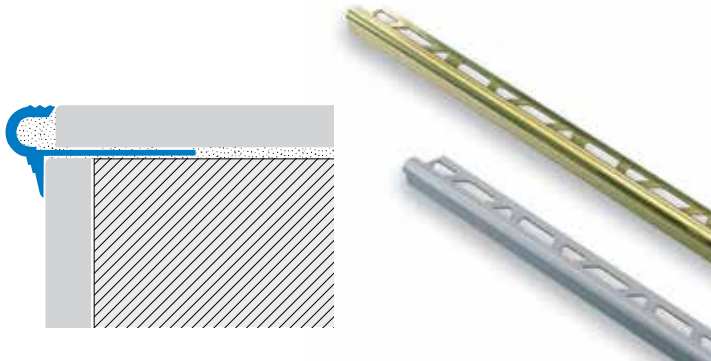

STAIRTEC FL-O* Extruded Brass

This brass profile is produced with first grade raw material, guaranteeing resistance to chemical and mechanical stress and wear. It is particularly suitable for areas with heavy, industrial traffic as well as for residential applications. Moisture and corrosive agents may oxidize the exposed surfaces. Buffing the profile with conventional polisher will bring back its shine in no time. Available in natural brass (ON): minimum quantity required for this option.

	H = in	mm	Art.		
Material: Extruded brass	5/16	8	FL	80	ON/OL
	3/8	10	FL	100	ON/OL
	1/2	12.5	FL	125	ON/OL
Finish: Natural (ON), Polished (OL)					
Length: 8'10" (2.70meters)					

STAIRTEC FL-AS Silver Anodized Aluminum

This profile has a silver coating, suitable for both indoor and outdoor application with high resistance to weathering and lower resistance to mechanical impact. During installation, excess adhesive and grout should be removed immediately to avoid stains.

Material: Extruded Anodized Aluminum	5/16*	8*	FL	80	AS
	3/8*	10*	FL	100	AS
	1/2*	12.5*	FL	125	AS
Finish: Silver (AS)					
Length: 8'10" (2.70meters)					
End caps: FLT* IS					



STAIRTEC FLR-IL Stainless Steel AISI 304

This stainless steel profile is appropriate for indoor and outdoor applications. Resistant to corrosion, it is recommended for food processing plants, commercial kitchens, public toilets and hospitals.


Material: Stainless Steel AISI 304	3/8	10	FLR	100	IL
	1/2	12.5	FLR	125	IL
Finish: Polish (IL)					
Length: 8'10" (2.70meters)					




stairtec™ FL

The **STAIRTEC FL** technical stair nosing profile elegantly finishes stair edges. Its angled shape becomes a distinctive design feature which hides imperfections and conceals the riser edge, whereas the tread covering can be simply laid flush in the indented lip of the profile. Solid and long-lasting, **STAIRTEC FL** is truly a decorative element in the design of the staircase. The grooved top surface is slip resistant and the profile is suited for both residential and commercial applications.

STAIRTEC SC stair nosing profiles are particularly designed for thin, resilient floor types. Simply lay the flooring on the step riser and install the profile covering the riser edge. Then proceed to lay the tread flooring flush in the indented lip of the profile. **STAIRTEC SC** profiles protect the tread edge and conceal riser imperfections.

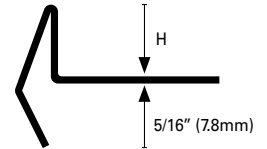

(FL 100*)

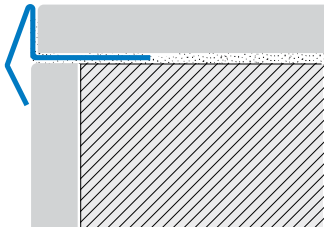

STAIRTEC FL-IL Polished Stainless Steel AISI 304 - DIN 1.4301
 This stainless steel profile ensures high resistance to corrosion. It is recommended for contouring kitchen countertops and shower stalls.

	H = in	mm	Art.		
Material:	5/16	8	FL	80	IL
Stainless Steel AISI 304	3/8	10	FL	100	IL
Finish: Polished (IL)	1/2	12.5	FL	125	IL
Length: 8'10" (2.70meters)					